

FIG. 1A



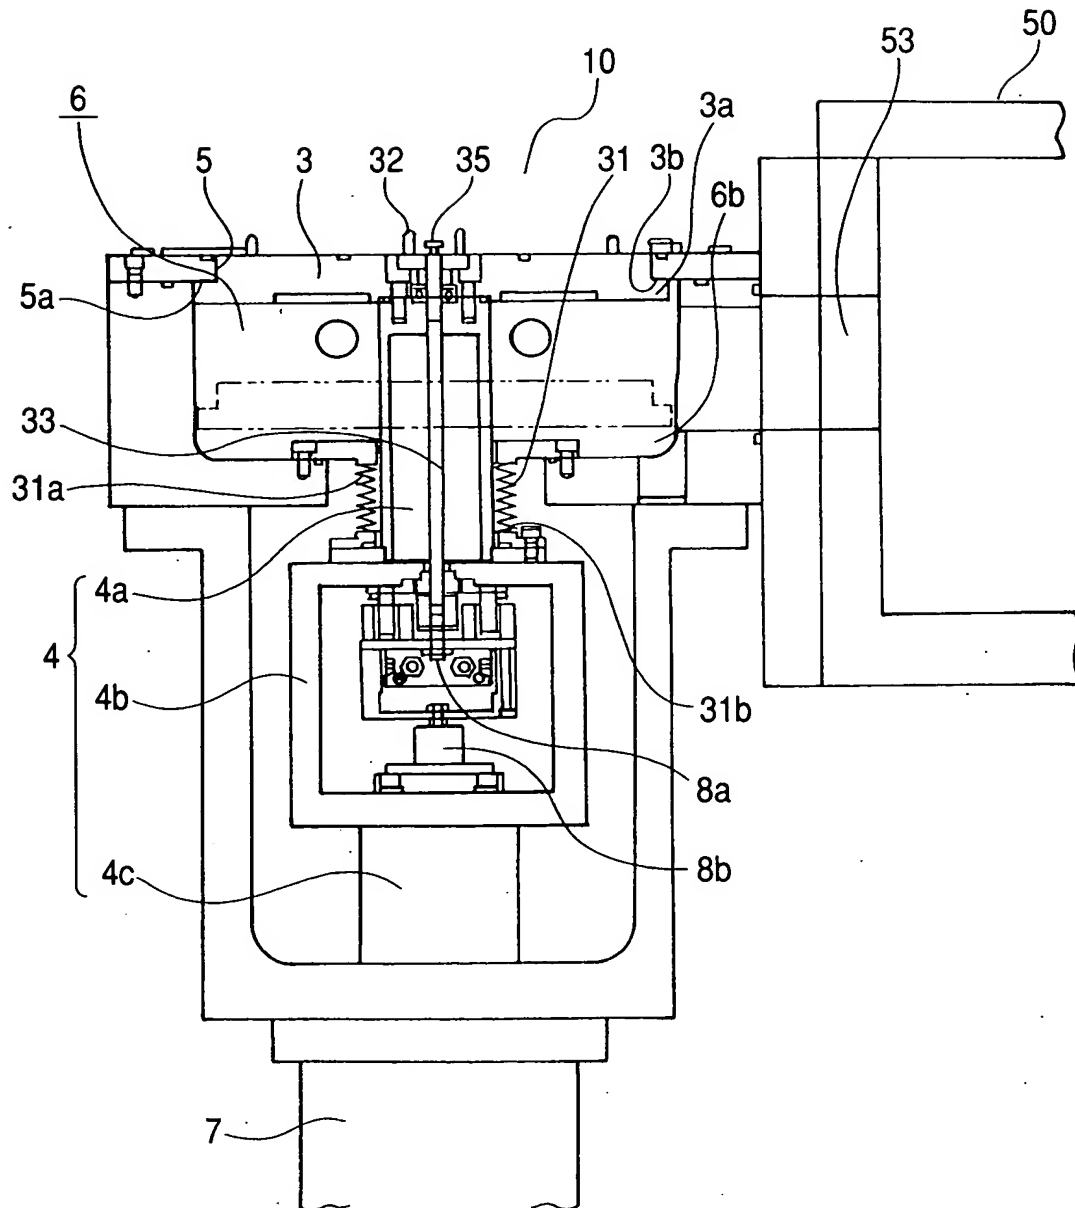


FIG. 1B

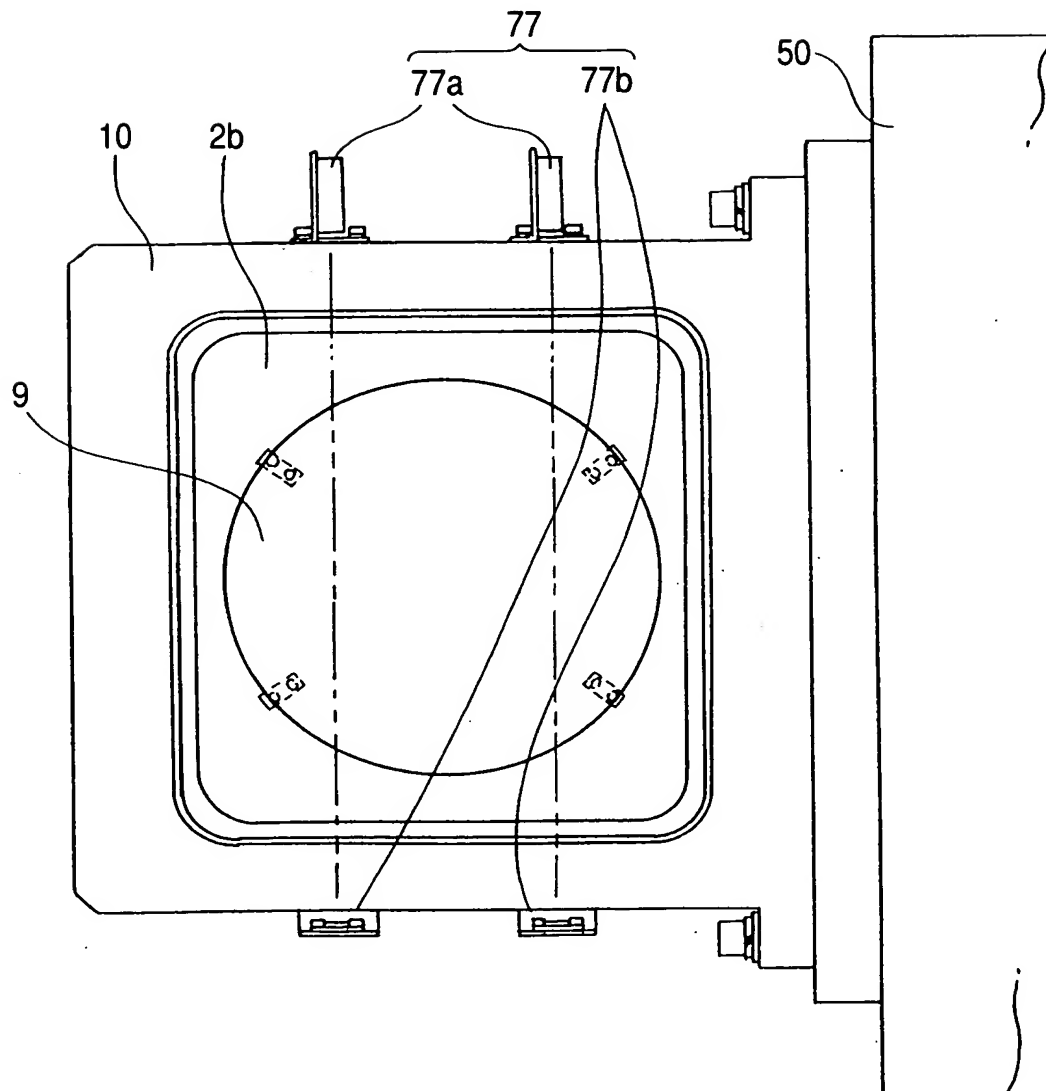

3 / 19

FIG. 2

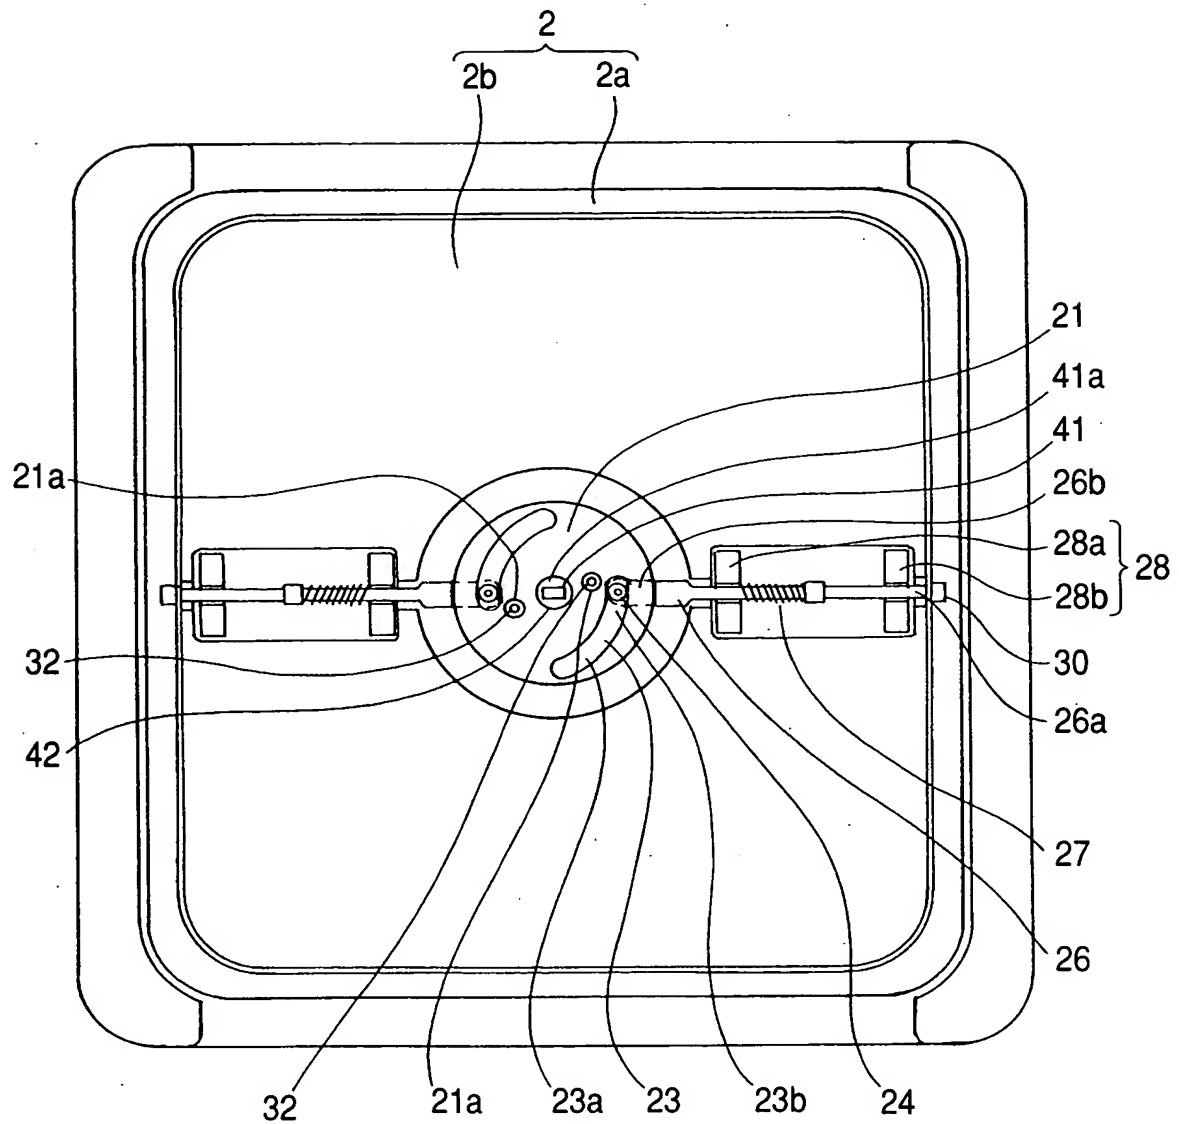

Top view of the device. The housing 41 is circular with a central opening 42. It features two protruding portions 45a at the top and bottom. The internal structure includes a central component 32 surrounded by a ring 21, which is further enclosed by a ring 21a. The device is shown in a perspective view with dashed lines indicating internal components.

[illegible]

FIG. 5A


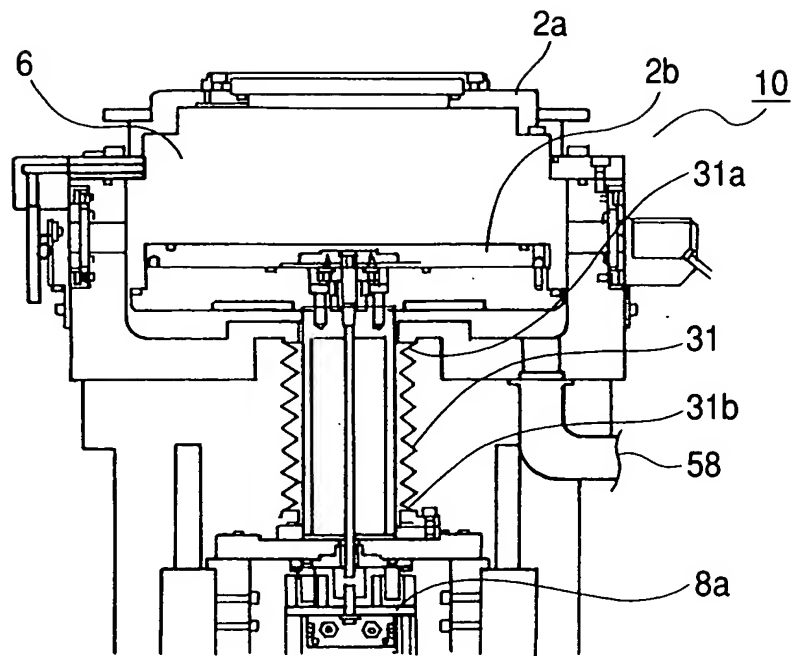


FIG. 5B

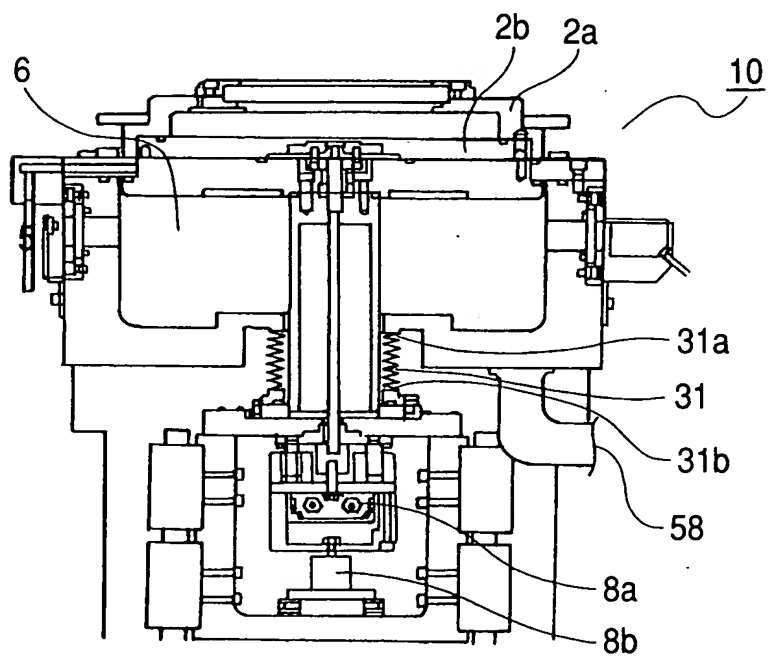

7 / 19

FIG. 6


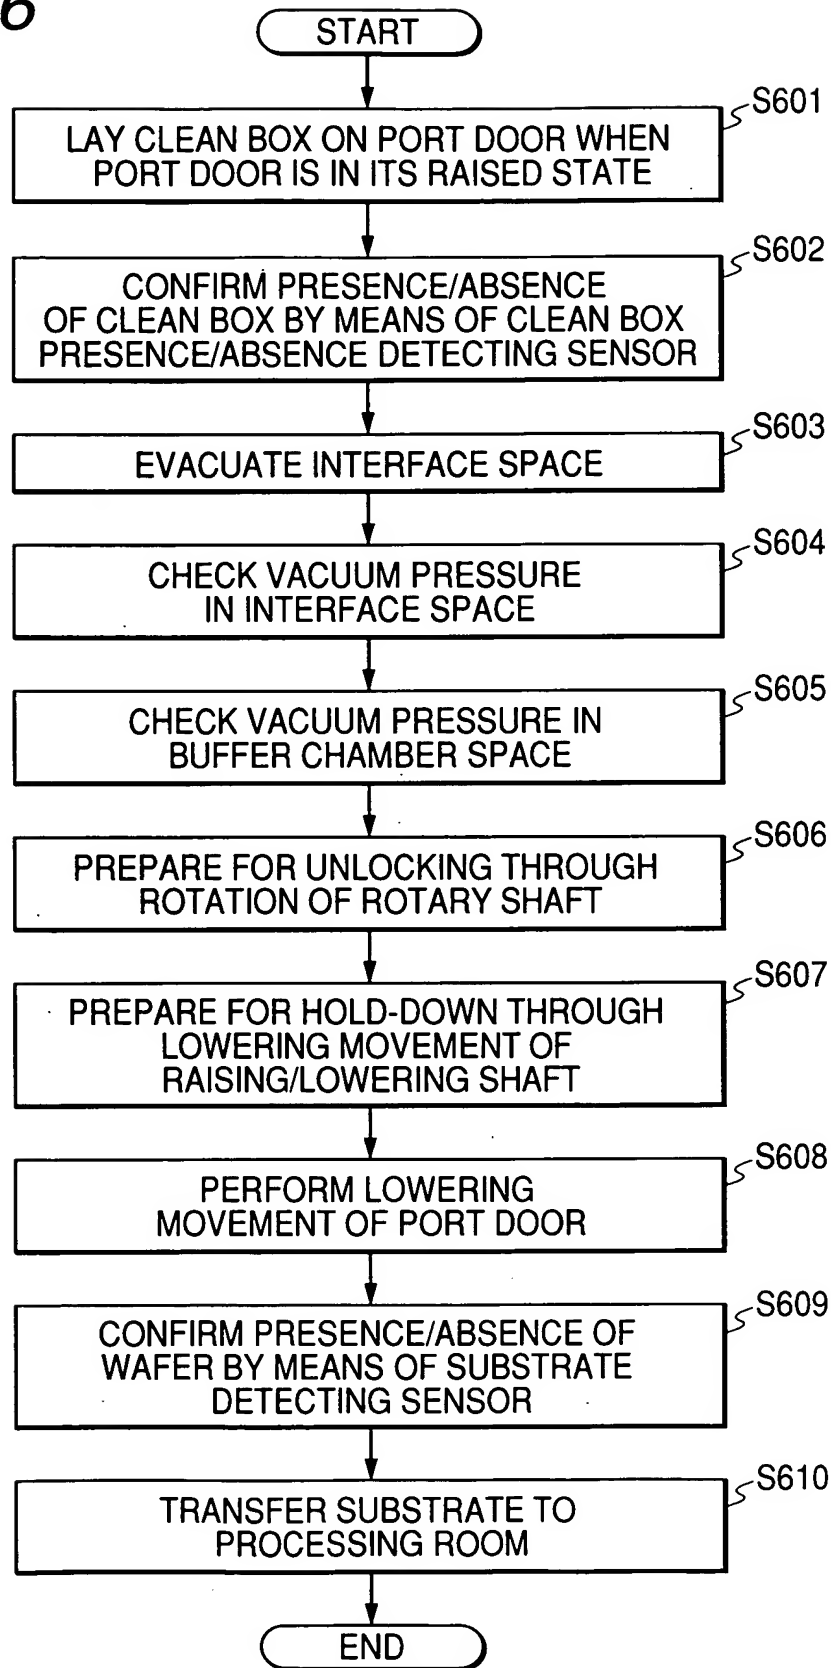


FIG. 7

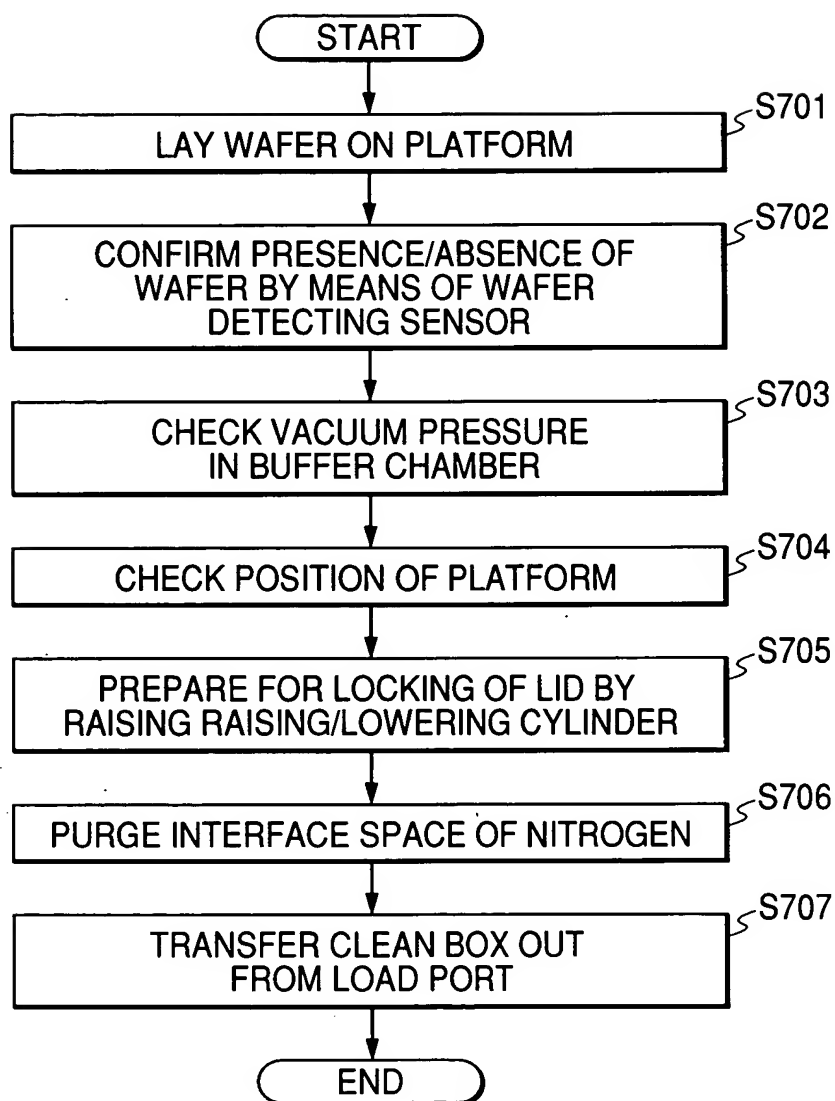

9 / 19

FIG. 8A


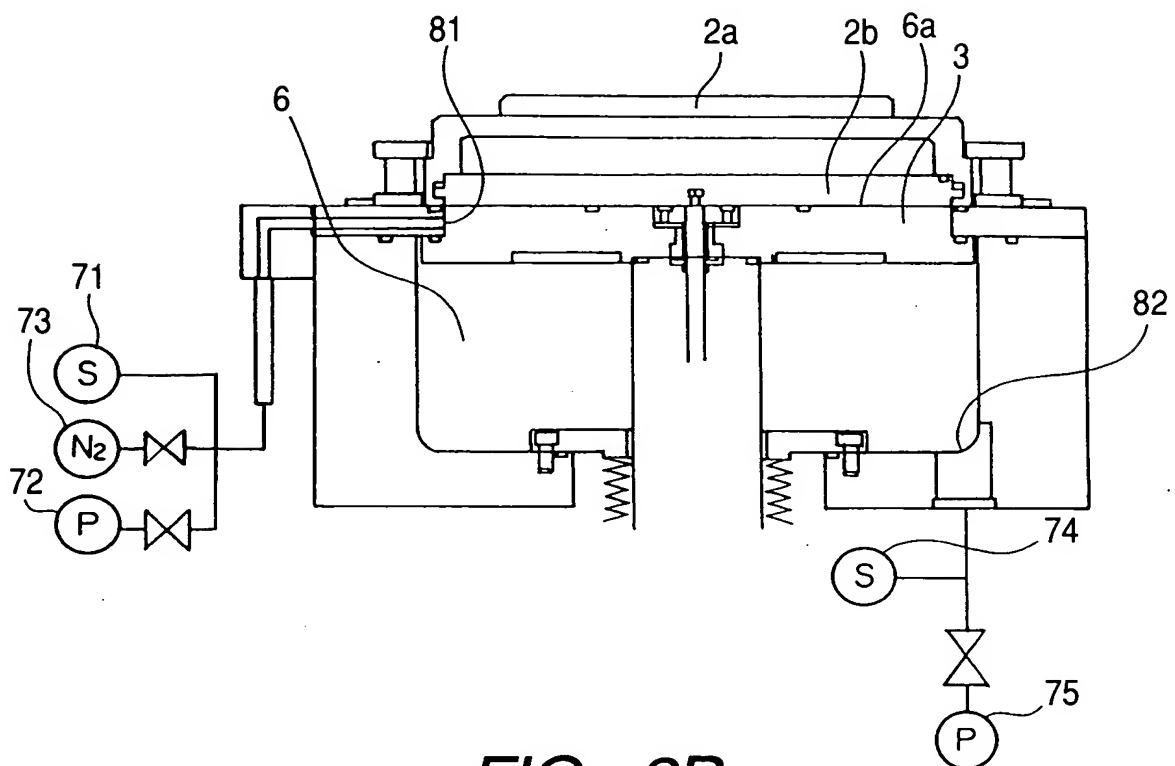


FIG. 8B

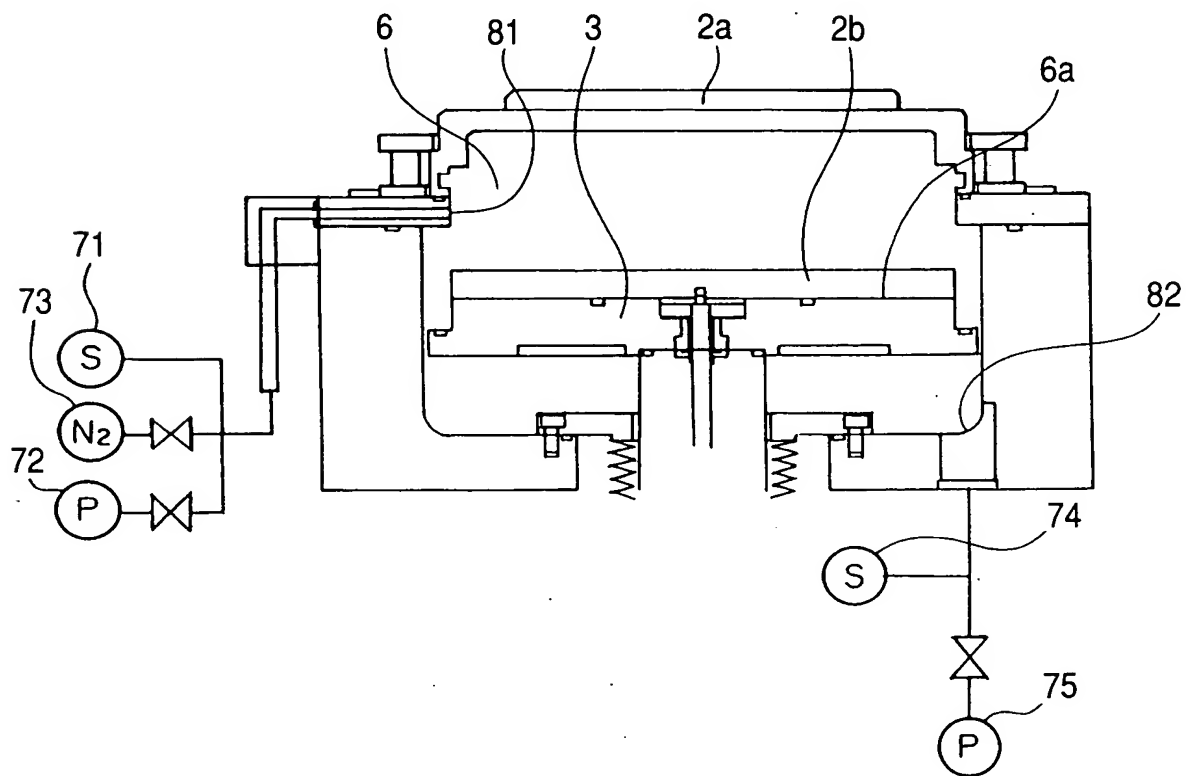

10 / 19

FIG. 8C

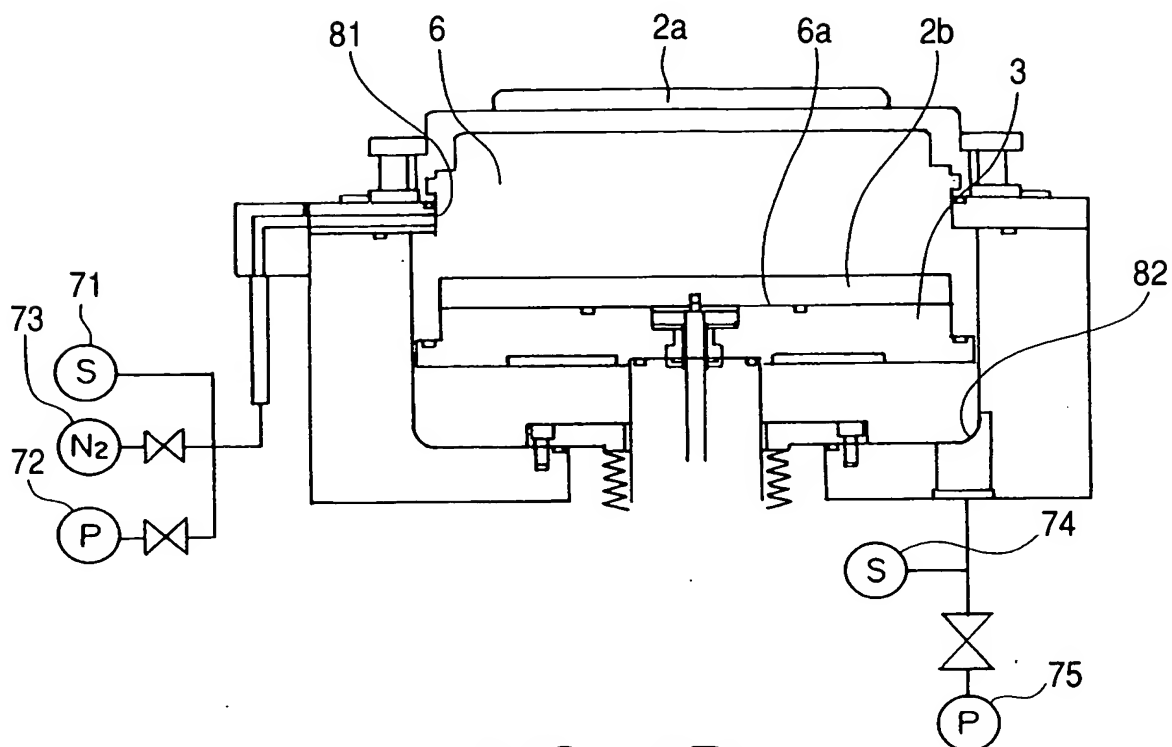


FIG. 8D

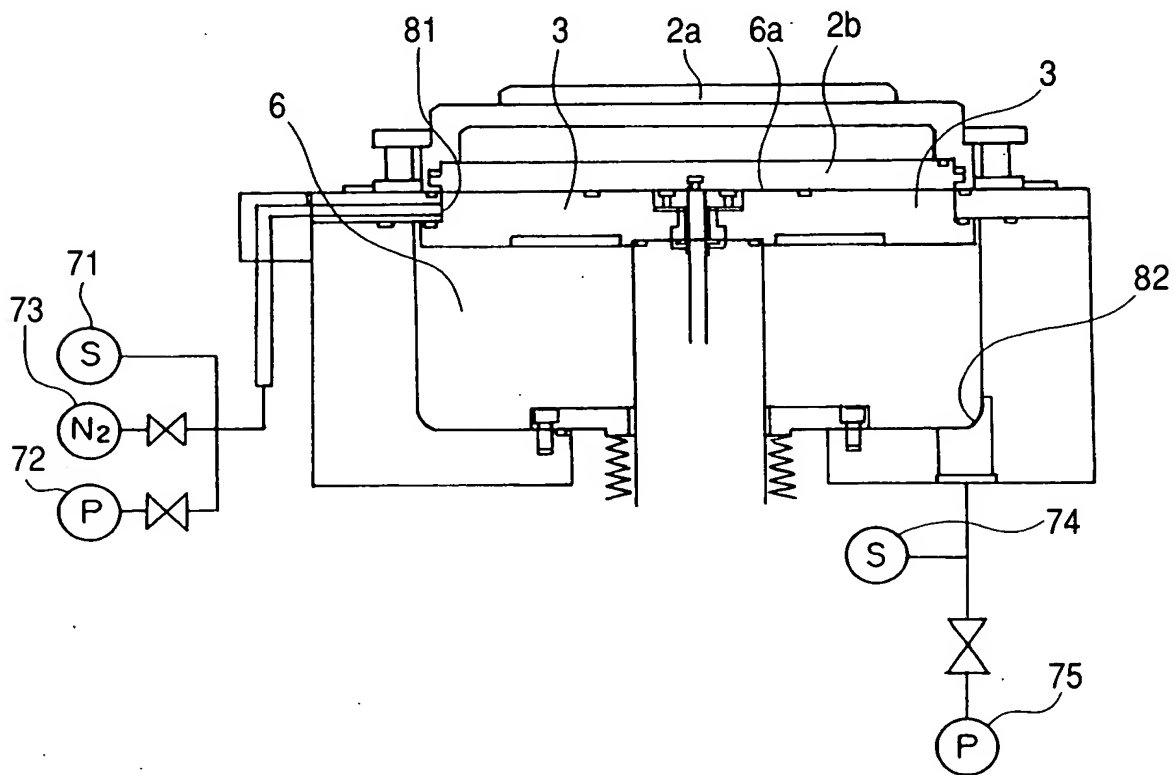


FIG. 9

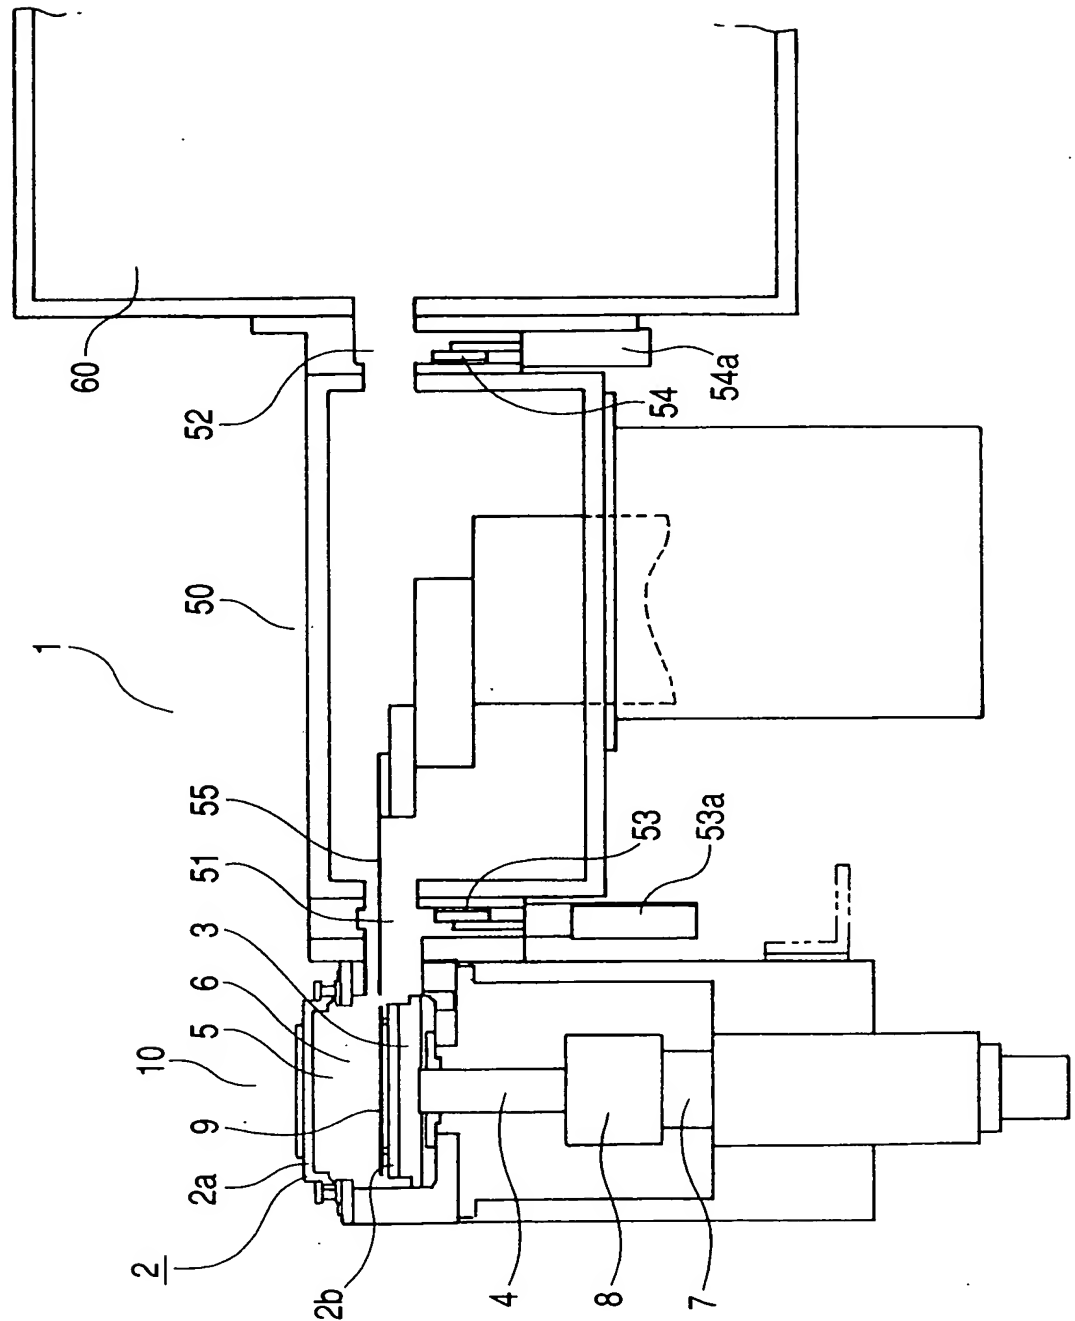


FIG. 11

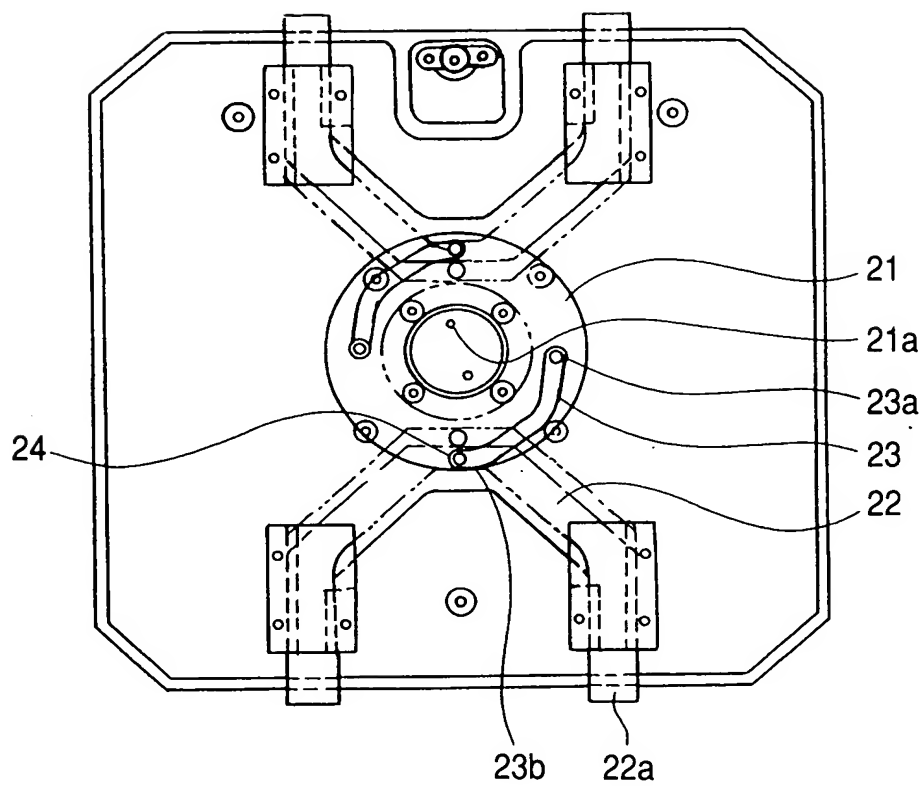


FIG. 12

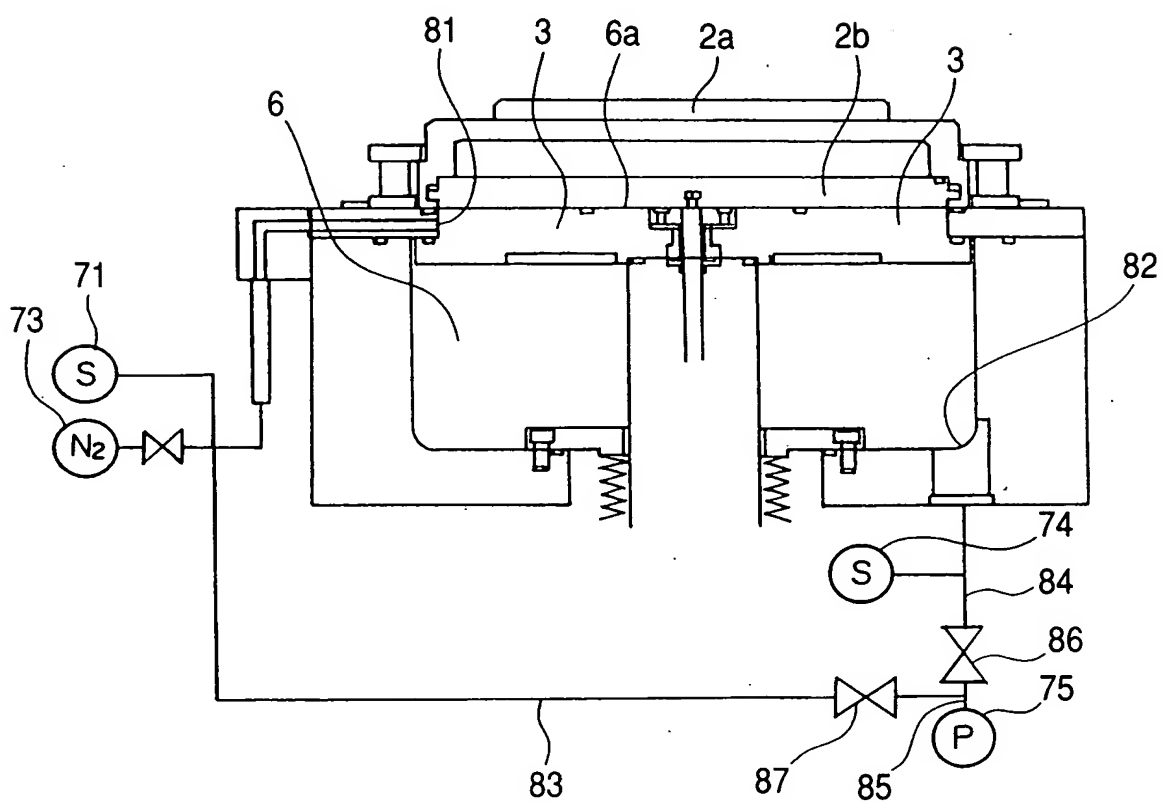


FIG. 13


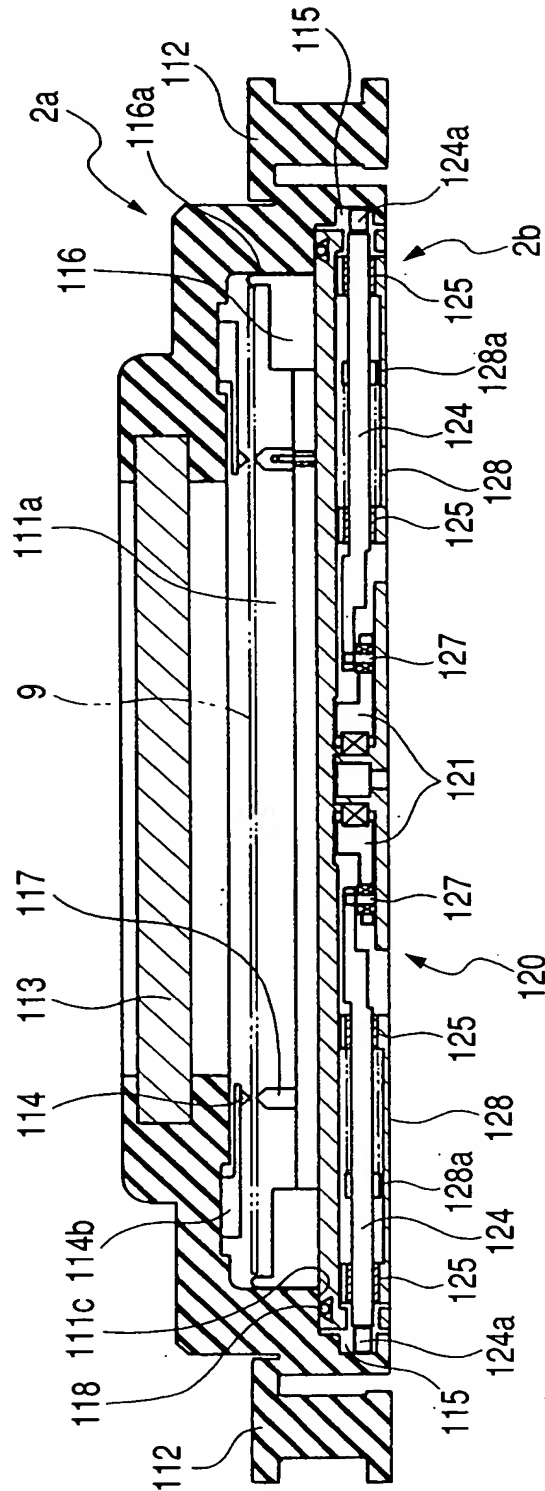


FIG. 14

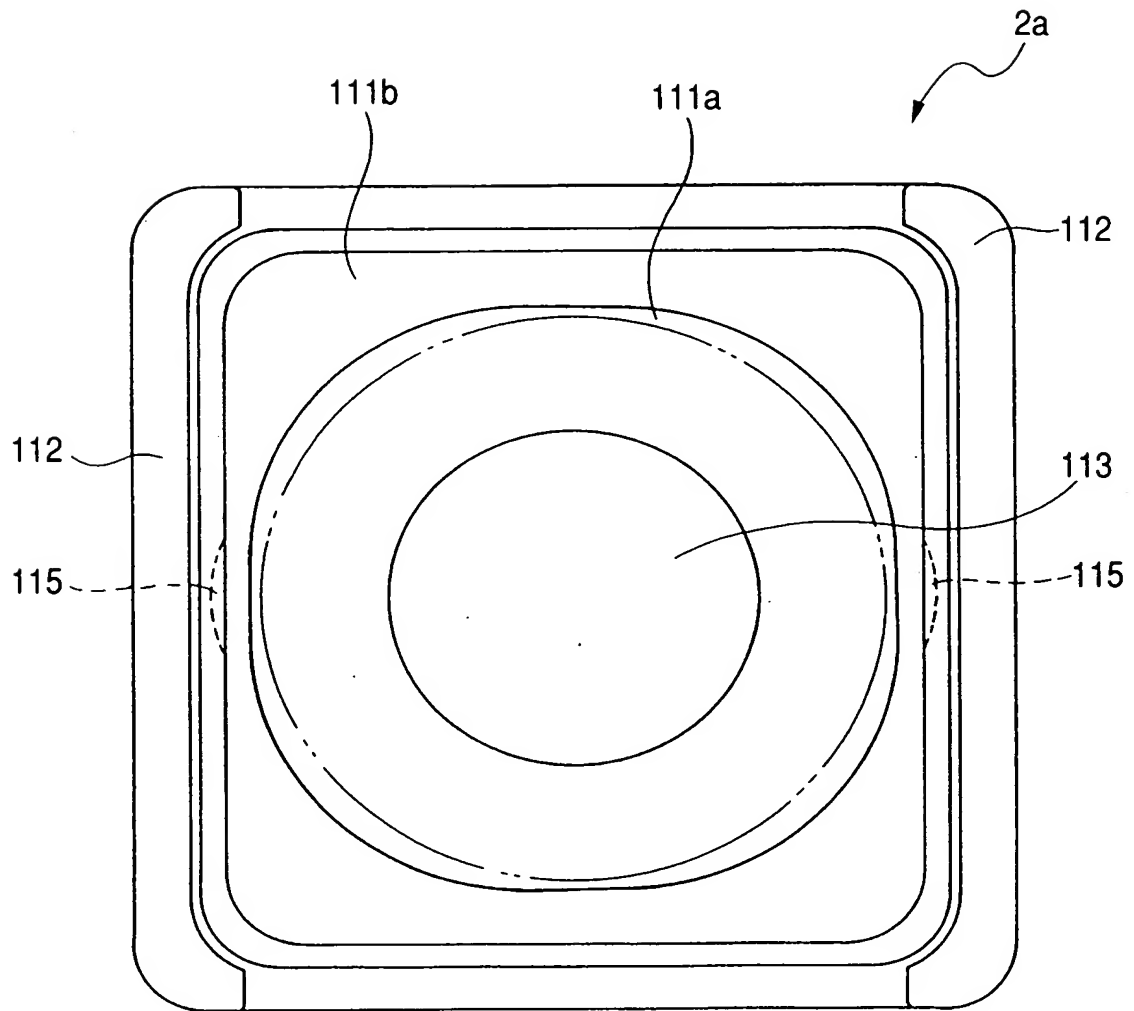

17 / 19

FIG. 15

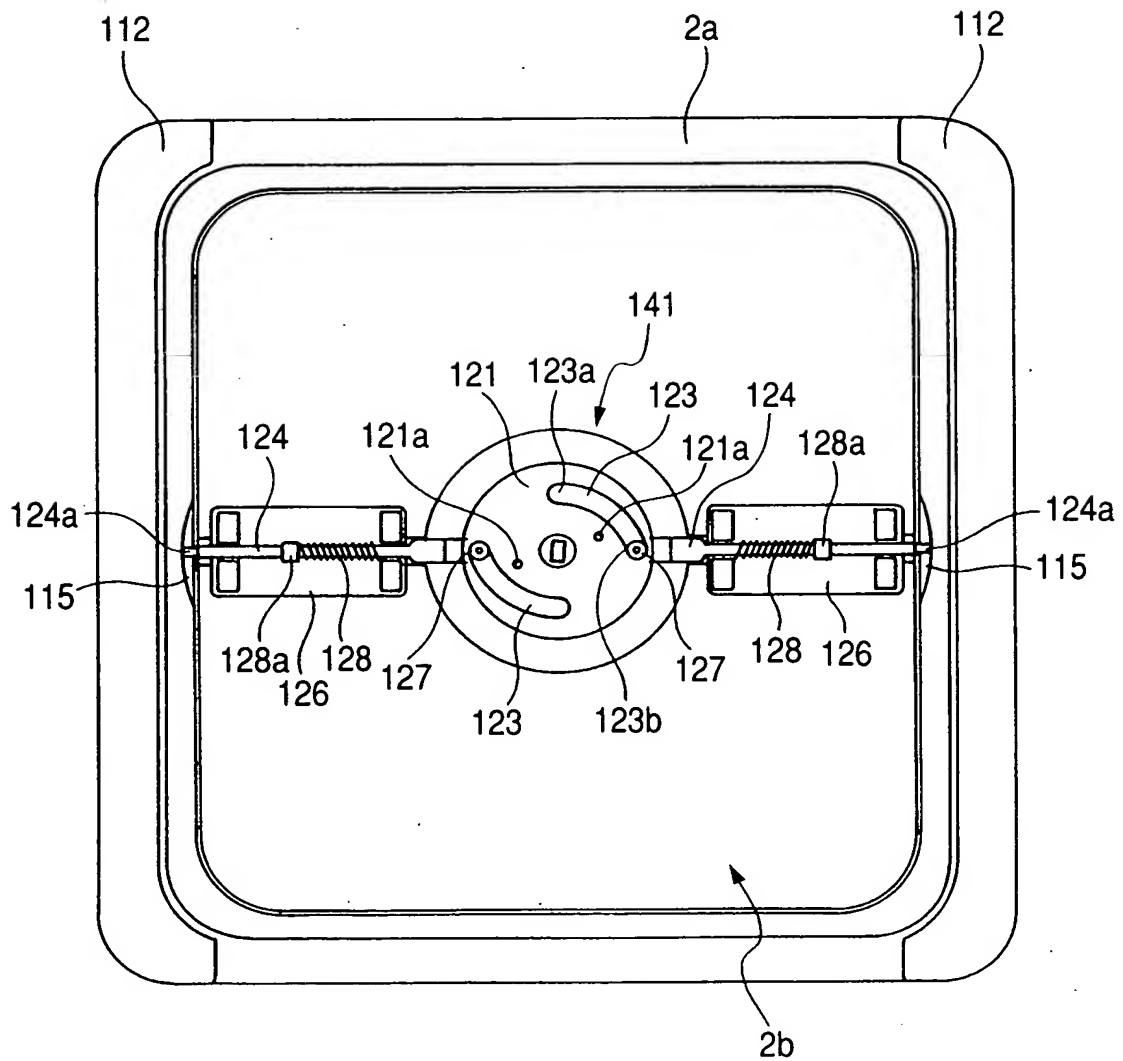


FIG. 16A

